Outdoor WPC

Decking, Wall Cladding, Fencing

U3, 13 McCormack,
Arndell Park, NSW 2148.
Email: enquiry@sparkbusinessgroup.com.au
www.sparkbusiness.com.au
02 88074717

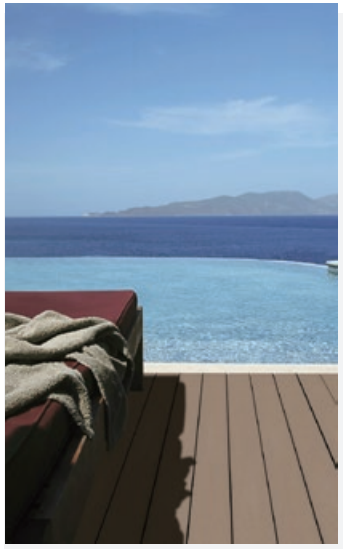



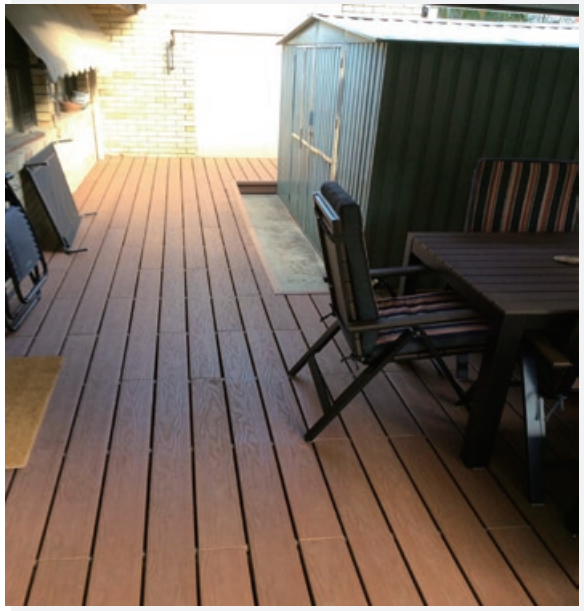

DECKING
PROJECTS SHOW

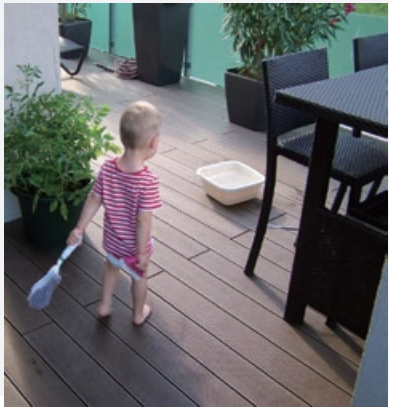

COMPOSITE DECKING : TS-03

WATER-PROOF

TERMITE RESISTANCE

NO PAINT / MAINTENANCE

EASY TO INSTALL

Sectional view	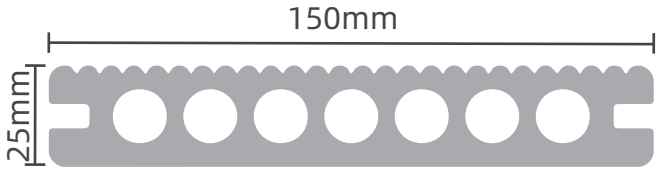
Item	TS-03
Size(mm)	150×25
Surface	Groove, 3D Embossing
Standard Length	2.2m or customized

Surface

Groove

Modern 3D Embossing

Classical 3D Embossing

Fashion 3D Embossing

Color

Cedar

Red Pine

Red Wood

Light Gray

Coffee

Red Brown

Blue Gray

Art Color

Cedar (Art Color)

Red pine (Art Color)

Red wood (Art Color)

Light gray (Art Color)

Brown (Art Color)

COMPOSITE DECKING : TW-K03

WATER-PROOF

TERMITE RESISTANCE

NO PAINT / MAINTENANCE

EASY TO INSTALL

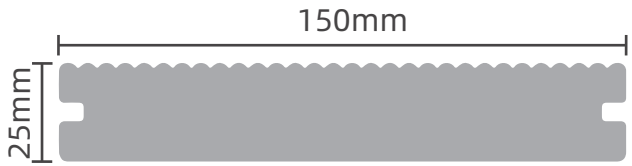

Sectional view	
Item	TW-K03
Size(mm)	150×25
Surface	Groove, Sanding, 3D Embossing
Standard Length	2.2m or customized

Surface

Groove

Modern 3D Embossing

Classical 3D Embossing

Fashion 3D Embossing

Color

Cedar

Red Pine

Red Wood

Light Gray

Coffee

Red Brown

Blue Gray

Art Color

Cedar (Art Color)

Red pine (Art Color)

Red wood (Art Color)

Light gray (Art Color)

Brown (Art Color)

CAPPED COMPOSITE DECKING : CO-02

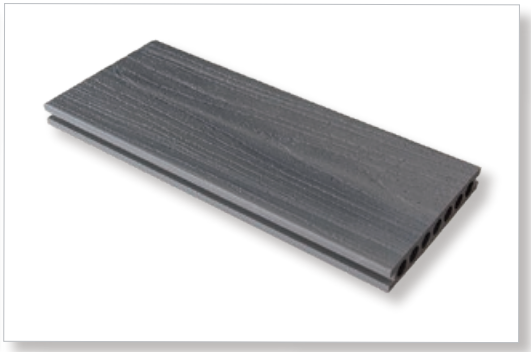

WATER-PROOF

TERMITE RESISTANCE

NO PAINT / MAINTENANCE

EASY TO INSTALL

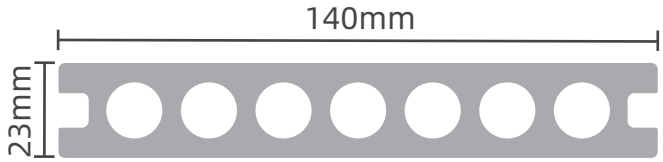

Sectional view	
Item	CO-02
Size(mm)	140×23
Surface	3D Embossing
Standard Length	2.2m or customized

Surface

Aurora

Starshine

Color

Smoke Gray

Stone Gray

OAK

Dark Teak

Maple

Teak

IPE

Walnut

Sea Blue

Matcha Green

Bright Purple

Amber Yellow

Ivory White

CAPPED COMPOSITE DECKING : CO-03

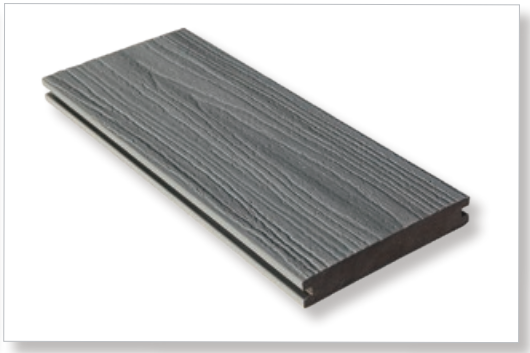

WATER-PROOF

TERMITE RESISTANCE

NO PAINT / MAINTENANCE

EASY TO INSTALL

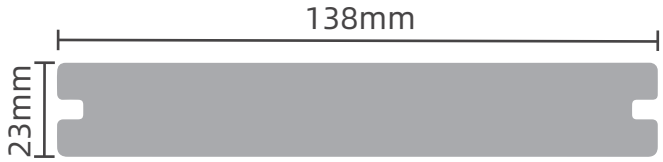

Sectional view	
Item	CO-03
Size(mm)	138×23
Surface	3D Embossing
Standard Length	2.2m or customized

Surface

Aurora

Starshine

Color

Smoke Gray

Stone Gray

OAK

Dark Teak

Maple

Teak

IPE

Walnut

Sea Blue

Matcha Green

Bright Purple

Amber Yellow

Ivory Whit

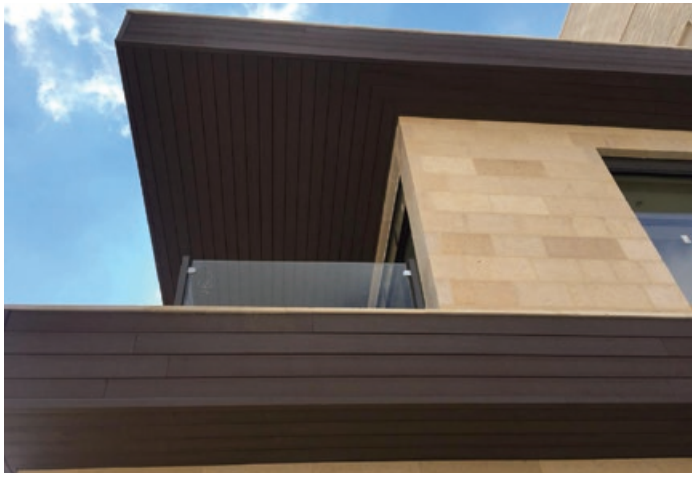

WALL CLADDING PROJECTS SHOW

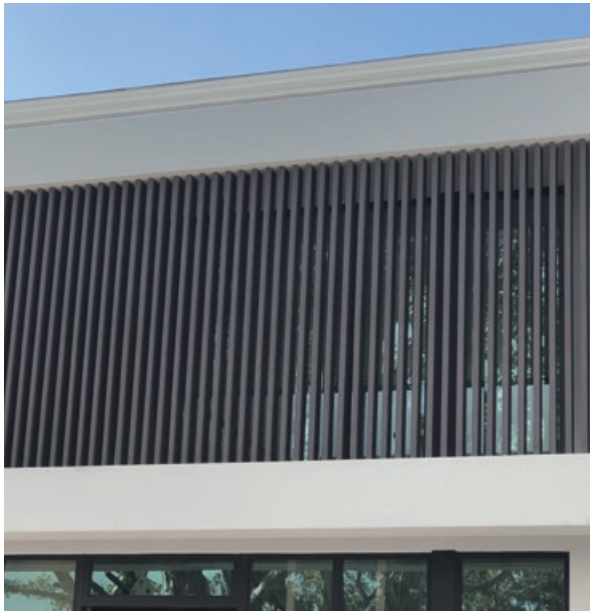

COMPOSITE WALL CLADDING : TF-04W

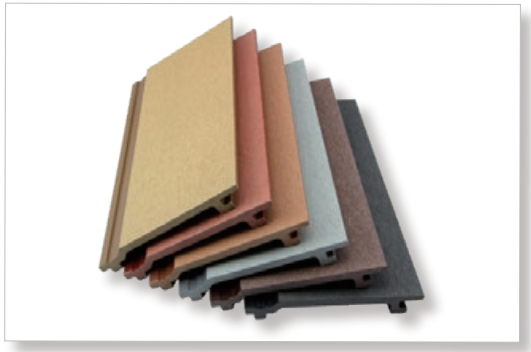

WATER-PROOF

TERMITE RESISTANCE

NO PAINT / MAINTENANCE

EASY TO INSTALL

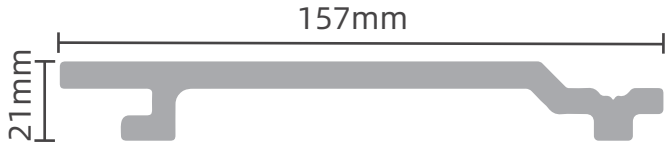

Sectional view	
Item	TF-04W
Size(mm)	157×21
Surface	Sanding, Brush, Embossing
Standard Length	2.2m or customized

Surface

Sanding

Fish shape
(Natural wood grain)

Cluster shape
(Natural wood grain)

Color

Cedar

Red Pine

Red Wood

Light Gray

Coffee

Red Brown

Blue Gray

Art Color

Cedar
(Art Color)

Red pine
(Art Color)

Red wood
(Art Color)

Light gray
(Art Color)

Brown
(Art Color)

COMPOSITE WALL CLADDING: CW-02

WATER-PROOF

TERMITE RESISTANCE

NO PAINT / MAINTENANCE

EASY TO INSTALL

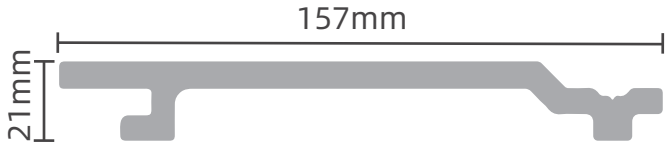

Sectional view	
Item	CW-02
Size(mm)	157×21
Surface	3D Embossing
Standard Length	2.2m or customized

Surface

Modern
3D Embossing

Classical
3D Embossing

Fashion
3D Embossing

Color

Cedar

Red Pine

Red Wood

Light Gray

Coffee

Red Brown

Blue Gray

Art Color

Cedar
(Art Color)

Red pine
(Art Color)

Red wood
(Art Color)

Light gray
(Art Color)

Brown
(Art Color)

CAPPED COMPOSITE WALL CLADDING : CO-09

WATER-PROOF

TERMITE RESISTANCE

NO PAINT / MAINTENANCE

EASY TO INSTALL

Sectional view	
Item	CO-09
Size(mm)	219×26
Surface	3D Embossing
Standard Length	2.2m or customized

Surface

Aurora

Starshine

Color

Smoke Gray

Stone Gray

OAK

Dark Teak

Maple

Teak

IPE

Walnut

Sea Blue

Matcha Green

Bright Purple

Amber Yellow

Ivory White

WPC FENCING

PROJECT CASE

AVAILABLE COLORS

Light Gray

Cedar

Red Pine

Red Wood

Red Brown

Coffee

Blue Gray

WPC FENCING

CWF-04

Standard Size: W1800 × H1800mm

MEASUREMENT

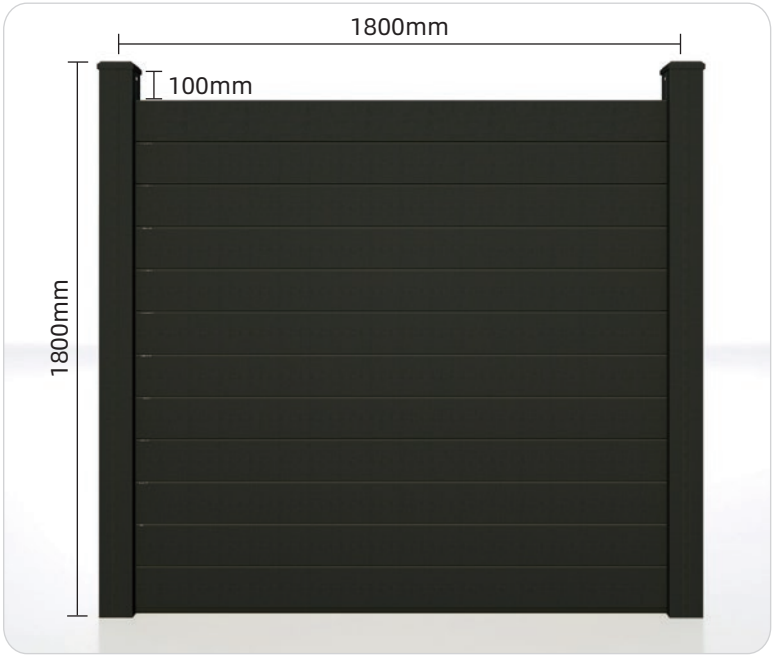

STYLE CHOICE

Type A.
Single-layer

ACCESSORIES



① Post
CFP-01(100×100mm)



② Fence Board
CFB-01(150×20mm)



③ Top Fence Board
CFB-02(140×20mm)

④ Steel Base
40×40mm

⑤ Aluminum Fence Base
CH-03(20×26mm)

⑥ Sealing Edge
CH-04(25×20mm)



⑦ Post Cap
110×110m

INSTALLATION STEP

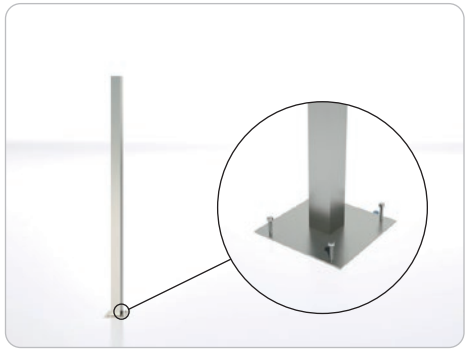

1. Fix the Steel Base

Fix the steel base by SS expansion bolt.
Noted: the ground must be flat and stable.

2. Fix the Post

Put the post on the steel base.

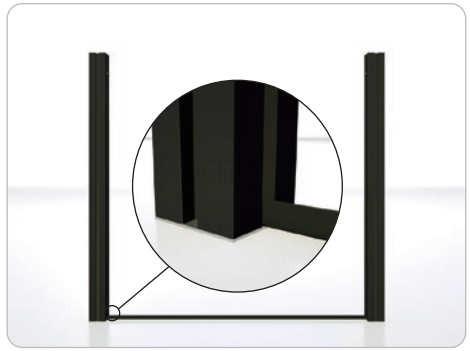

3. Fix the Aluminum Fence Base

Place the aluminum fence base on the bottom layer along the groove of the post.

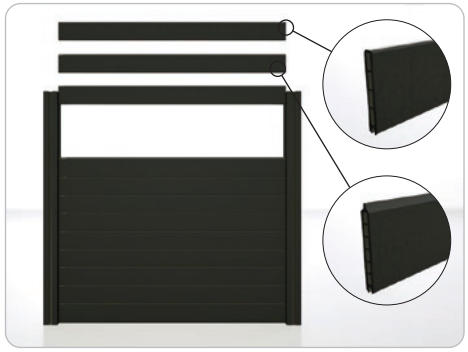

4. Fix the Fence board

Place the fence board one by one along the groove of the post. Then use top fence board for the top one.

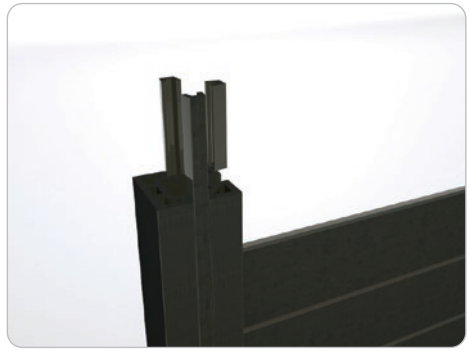

5. Fix the Sealing Edge

Insert the sealing edge into the grooves on the three sides of the post.

6. Fix the Post Cap

Put the post cap on the top of the post, then fix with screw. The installation now is all finished.

Spark Business Group Pty Ltd
U2, 13 McCormack Street, Arndell Park, 2148, NSW,
Tel: 02 9907 4717
Website: www.sparkbusinessgroup.com.au
Email: enquiry@sparkbusinessgroup.com.au